

## Equipment Information

### Staging

16m<sup>2</sup> Staging Platform in 1m<sup>2</sup> sections. Includes side rails, safety edge, box of clips and steps.

#### Assembly

##### Assembling Easydeck Square Frames with Panels and Chair Stops

 16 x **Reversible Square Deck Panel**



 16 x **Square Frame**

 ~~4 x Support Channels~~

 12 x **Joint Channels**

 28 x **Joint Clips**

 7 x **Chair Stops**

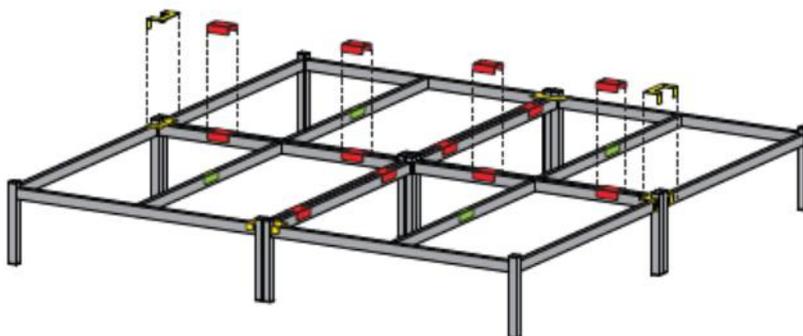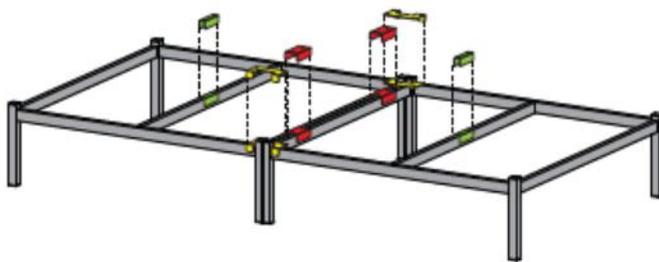

#### Assembly Instructions:

- Arrange the base frames in the desired configuration.

- Clip each frame part together using the joint clips/joint channels



- Place reversible deck panels onto completed frame

### **Risk Assessment Portable Staging Transportation, Erection & Dismantling**

#### **WHO MAY BE HARMED**

Outreach Staff including casual labour and Volunteers assisting in erection / dismantling

#### **RISKS**

Injuries to hands and feet when transporting, erecting & dismantling

Lifting strains

#### **CONTROLS/ACTION TO MINIMISE RISK**

Wearing of suitable safety clothing, i.e., Safety boots, work gloves

Refer to 'Trailer Use Risk Assessment' for transportation

At least One Village Outreach person must take charge of the work

#### **WHEN ERECTING/DISMANTLING**

Use correct manual handling technique for lifting of weights

On firm ground have suitable packing material available for keeping stage surface level for performers/users